




**FO-SUSU-MD21-0\_\_\_-OG**

# FIBER OPTIC PATCHCORD

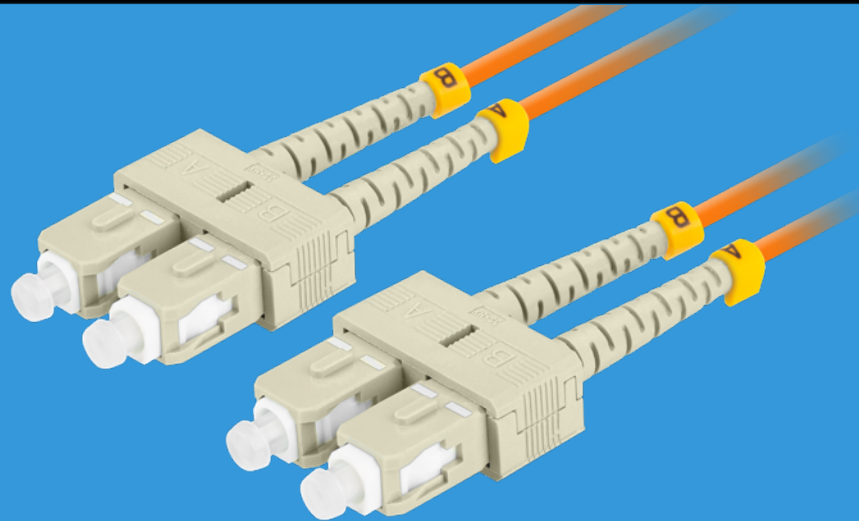

**PRODUCT SPECIFICATION:**

- Connector type: SC
- Polishing standard: UPC - ULTRA PHYSICAL CONTACT
- Fiber type: OM2
- Type of optical fiber: multimode (MM)
- Fiber diameter: 50/125 µm
- Cable Construction: DUPLEX
- Cable diameter: 3.0 mm
- Coating: LSZH, LSOH (Low smoke zero halogen)
- Insertion loss: ≤ 0,20 dB
- Return loss: ≥ 30 dB
- Operating temperature: -40 – 85°C
- Minimum bend radius: 7,5 mm
- Color: orange
- Cable length: 2 m, 5 m

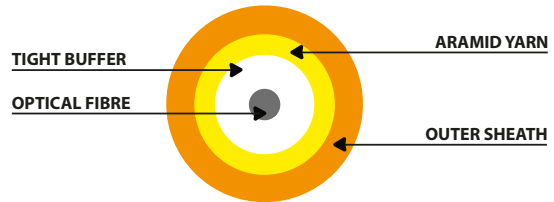

CAT.NO	FULL NAME
FO-SUSU-MD21-0020-OG	FIBER OPTIC PATCHCORD MM SC/UPC-SC/UPC DUPLEX 3.0MM OM2 50/125 LSZH 2M ORANGE LANBERG
FO-SUSU-MD21-0050-OG	FIBER OPTIC PATCHCORD MM SC/UPC-SC/UPC DUPLEX 3.0MM OM2 50/125 LSZH 5M ORANGE LANBERG