



Cable ID/ Test ID: PCF6A-10CU-1000-S-001

Test Limit: ISO11801 Channel Class Ea

Limits Version: V7.11

Date / Time: 2026/05/07 14:50:57

Operator: Lanberg

Headroom 24.1 dB (NEXT 3,6-4,5)

Cable Type: Cat 6A S/FTP

NVP: 77.0%

Main: Versiv

S/N: 24410021

Software Version: V6.14 Build 9

Calibration Date: 2025/05/28

Adapter: DSX-602 (DSX-CHA004)

S/N: 25073276

Test Summary: PASS

Remote: Versiv

S/N: 24250049


Software Version: V6.14 Build 9

Calibration Date: 2025/05/28

Adapter: DSX-602R (DSX-CHA004)

S/N: 25073277

Length (m), Limit 100.0	[Pair 1,2]	11.5
Prop. Delay (ns), Limit 555	[Pair 4,5]	51
Delay Skew (ns), Limit 50	[Pair 3,6]	1
Resistance (ohms), Limit 25.00	[Pair 4,5]	3.65
Insertion Loss Margin (dB)	[Pair 7,8]	41.9
Frequency (MHz)	[Pair 7,8]	487.0
Limit (dB)	[Pair 7,8]	48.6




Wire Map (T568B)



PASS





Insertion Loss (dB)

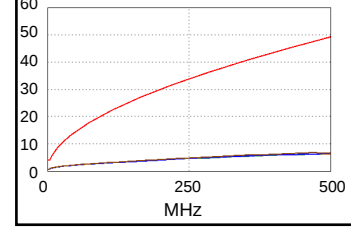



	Worst Case Margin	Worst Case Value		
PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
NEXT (dB)	24.1	24.9	24.5	24.9
Freq. (MHz)	470.0	476.0	496.0	476.0
Limit (dB)	27.8	27.5	26.7	27.5
Worst Pair	3,6	3,6	3,6	3,6
PS NEXT (dB)	25.6	26.5	25.6	27.4
Freq. (MHz)	482.0	463.0	482.0	482.0
Limit (dB)	24.2	25.1	24.2	24.2

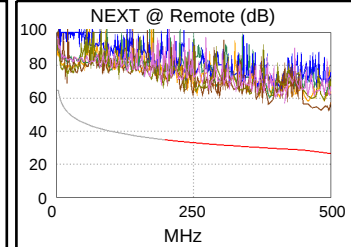



	Worst Case Margin	Worst Case Value		
PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
ACR-F (dB)	18.4	18.4	18.4	18.4
Freq. (MHz)	499.0	499.0	499.0	499.0
Limit (dB)	9.3	9.3	9.3	9.3
Worst Pair	4,5	3,6	4,5	3,6
PS ACR-F (dB)	20.9	20.9	20.9	20.9
Freq. (MHz)	499.0	499.0	499.0	499.0
Limit (dB)	6.3	6.3	6.3	6.3

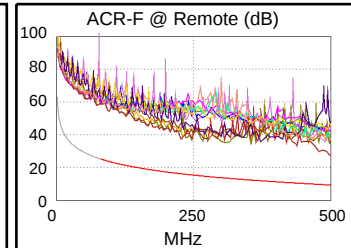

	Worst Case Margin	Worst Case Value		
PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-7,8	1,2-3,6	3,6-4,5	3,6-4,5
ACR-N (dB)	19.3	24.9	65.9	65.8
Freq. (MHz)	2.9	2.0	496.0	476.0
Limit (dB)	61.0	61.0	-21.1	-19.7
Worst Pair	3,6	3,6	3,6	3,6
PS ACR-N (dB)	20.9	24.7	66.7	68.5
Freq. (MHz)	2.9	7.6	482.0	482.0
Limit (dB)	58.0	50.3	-23.2	-23.2

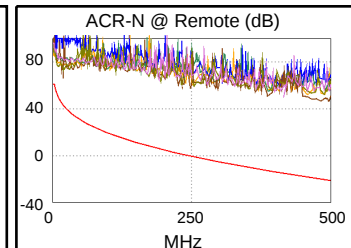

	Worst Case Margin	Worst Case Value		
PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6	3,6	3,6	3,6
RL (dB)	9.0	7.0	9.0	7.0
Freq. (MHz)	234.5	229.5	234.5	229.5
Limit (dB)	8.3	8.4	8.3	8.4

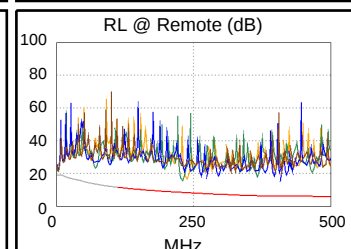

Compliant Network Standards:

10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
10GBASE-T	ATM-25	ATM-51
ATM-155	100VG-AnyLan	TR-4
TR-16 Active	TR-16 Passive	